High pressure


Sight glass indicator

Bauform 912

Application:

The flow indicators are used for optical control of fluids and gases, for horizontal and vertical pipe lines.

High pressure - design

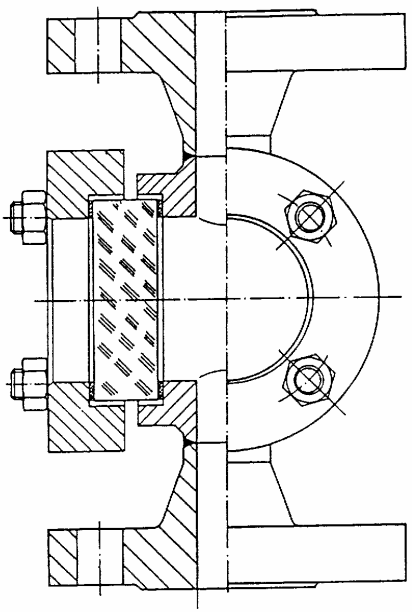

Installation:

Optional

Operating conditions:

Working pressure:	up to 160 bar
Working temperature:	with borosilicate glass max. 280°C
	with quarzglass up to 500°C

Possible Connection:

Flange connection acc. to DIN up to PN 160
Flange connection acc. to ANSI up to 1.500 LBS
Butt weld ends
Female-threaded

Dimensions:

Working pressure and nominal diameter have an affect on the length.

Materials:

All materials which can be welded are possible.

Certificate: (Option)

Acc. to EN 10204 - 2.2 or
Acc. to EN 10204-3.1.B

Options:

with - ANSI-flanges
- Butt weld ends
- Heating jacket
- Sight glass light - fittings



Modifications reserved

AVEMAR CZECH s.r.o. | speciální armatury pro měření a regulaci |
Branch office | Podvihovská 378/12C | 747 70 Opava 9 - Komárov | Česká republika |
Tel.: +420 553 764 015 | Fax: +420 553 654 820 | www.avemar.cz | avemar@avemar.cz |

E912 01/05