Sight Flow Indicators (straight line) *with Flap*

with ***flanged*** connection acc. to ***ANSI - 150 / 300 lbs***

Cast Iron	GG 25 (EN-GJL-250) **max. 150 lbs**
Cast Steel	GS-C 25 (1.0619 / GP240GH)
Stainless Steel	WN 1.4408

AVEMAR CZECH s.r.o.

Bauform 880-A-K

Application:

The flow indicators are used for optical control of fluids and gases, for horizontal and vertical pipe lines. Also available with internal spinner.

Installation:

Horizontal or vertical (flow direction from bottom to top) for constant flow direction

Operating conditions:

Working pressure: 16 bar by 150 lbs
40 bar by 300 lbs
Working temperature: 150°C or 280°C

Certificate: (Option)

Acc. to EN 10204-2.2 or 3.1

Options:

with - Spinner
- Heating jacket
- Sight glass light - fitting


Materials:

Body	**GG 25**	**GS-C 25**	**1.4408**
Covers	GG 25 / S235JRG2	GS-C 25 / S235JRG2	1.4408 / 1.4301
Screws	4.6 / 5.6 gal.		A4-70
Sight glass	Borosilicate glass DIN 7080 (280°C) Soda-lime glass DIN 8902 (150°C)		
Gaskets	Graphite, (or other materials)		
Flap	1.4571		

Ordering example:

Sight Flow Indicators with Flap; Bauform 880-A-K
GS-C 25, borosilicate glass DIN 7080-16 bar
ANSI 2"; 150 lbs



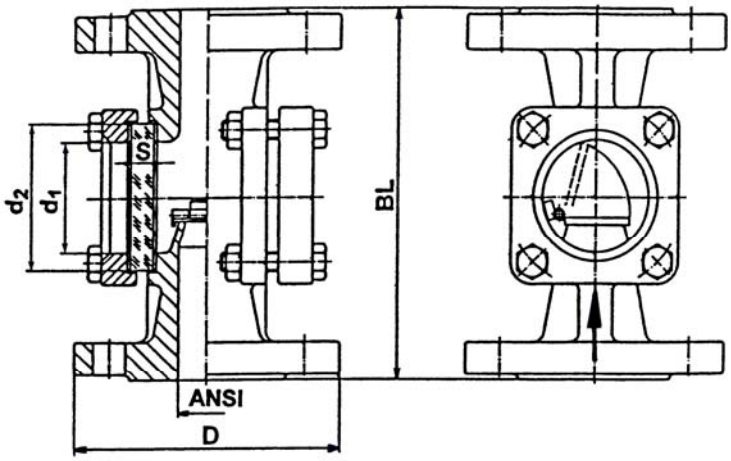

Dimensions:

ANSI	D		BL (DIN F1)	d_1	Glass plate		
	150 lbs	300 lbs			d_2	S 16 bar	S 40 bar
1/2"	89	95,2	130	32	45	10	10
3/4"	98	117,3	150	32	45	10	10
1"	108	123,8	160	48	63	10	15
1 1/4"	118	133,4	180	48	63 ***	10	15
1 1/2"	127	155,6	200	65	80	12	20
2"	152	165,1	230	80	100	15	25
2 1/2"	178	190,5	290	80	100	15	25
3"	191	209,6	310	100	125	20	30
4"	228 *	254,0	350	125	150	25	32
5"	254 *	279,4	400	150	175	25	a.A.
6"	279	317,5	480	175	200	30 **	a.A.
8"	343 *	381,0	600	175	200	30 **	a.A.
10"	406 *		730	175	200	30 **	a.A.

* by cast iron different diameter by D acc. to DIN
** 16 bar only with borosilicate glass possible
*** by cast iron glasses Ø 80x12mm

Modifications reserved

AVEMAR CZECH s.r.o. | speciální armatury pro měření a regulaci |
Branch office | Podvihovská 378/12C | 747 70 Opava 9 - Komárov | Česká republika |
Tel.: +420 553 764 015 | Fax: +420 553 654 820 | www.avemar.cz | avemar@avemar.cz |