Sight glass valves

with male threaded connection

AVEMAR CZECH s.r.o.

Bauform 232

Application:

These glasses are suitable for screw in situations.
For example in tanks, pipes and vessels.
They are working with fluids also with gas.
Especially for one-off designs.

Operating conditions:

Working pressure : up to 40 bar
Working temperature: 150℃ or 280℃

Installation:

Optional

Connections:

Male threaded: G (BSP)

Materials:


Body	Steel or Stainless steel
Glass	Borosilicate glass acc. to DIN 7080 Soda lime glass acc. to DIN 8902


Selection criteria:

Thread diameter
Working pressure
Working temperature
Body materials
Glass

Ordering example:

Sight flow valves Bauform 232
WN 1.4571
Borosilicate glass DIN 7080-16 bar
G 1”

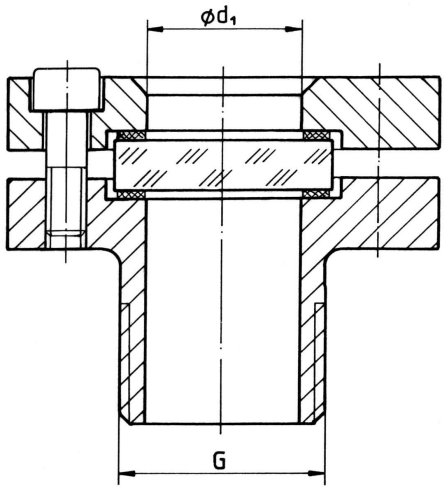

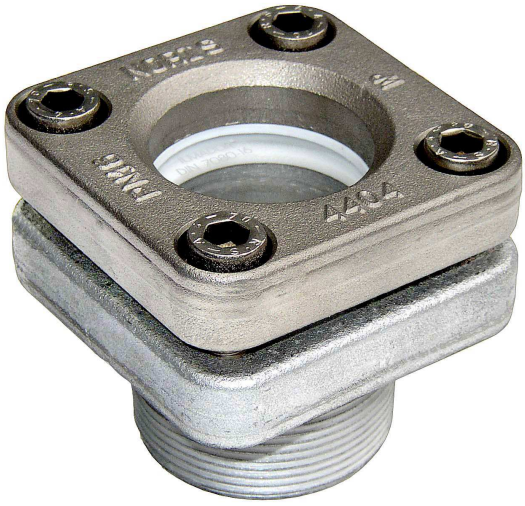

Modifications reserved

AVEMAR CZECH s.r.o. | speciální armatury pro měření a regulaci |
Branch office | Podvihovská 378/12C | 747 70 Opava 9 - Komárov | Česká republika |
Tel.: +420 553 764 015 | Fax: +420 553 654 820 | www.avemar.cz | avemar@avemar.cz |