
Angle Sight flow indicator

with flanged connection acc. to ***DIN***
Steel
Stainless steel

AVEMAR CZECH s.r.o.

Bauform 920

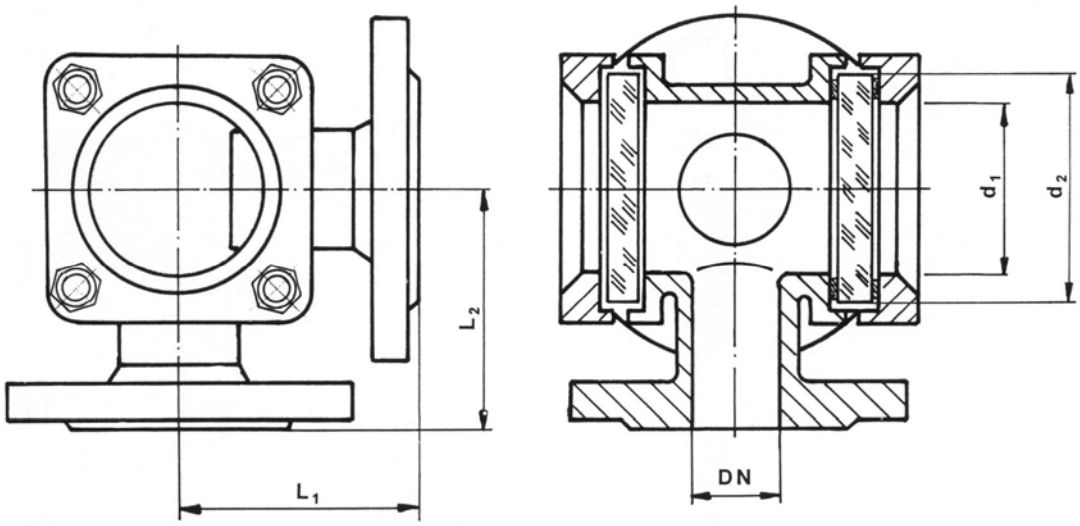

Application:

The flow indicators are used for optical control of fluids and gases, for horizontal and vertical pipe lines.

Construction:

different materials
all working pressure up to PN 160

Options:

with - ANSI flanges
- Extra length
- Different nom. sizes for connection
- Heating jacket
- Sight glass light - fitting
- Special sealing system acc. to DIN 28121
- Special design acc. to customer



Dimensions:

DN	$L_1 = L_2$	d_1	d_2
15	90	48	63
20	95	48	63
25	100	65	80
32	105	80	100
40	115	80	100
50	125	100	125
65	145	100	125
80	155	100	125
100	175	125	150

DN 125 - DN 250 on request

Modifications reserved

AVEMAR CZECH s.r.o.

AVEMAR CZECH s.r.o. | speciální armatury pro měření a regulaci |
Branch office | Podvihovská 378/12C | 747 70 Opava 9 - Komárov | Česká republika |
Tel.: +420 553 764 015 | Fax: +420 553 654 820 | www.avemar.cz | avemar@avemar.cz |