3-Way Sight Flow Indicators

with ***flanged*** connection acc. to ***DIN - PN 16,25,40***

Cast steel GS-C 25 (1.0619)
Stainless steel WN 1.4408

AVEMAR CZECH s.r.o.

Bauform 972

Application:


The flow indicators are used for optical control of fluids and gases, for horizontal and vertical pipe lines.


Certificate (Option) :

Acc. to EN 10204 - 2.2 or
Acc. to EN 10204 - 3.1

Options:

with - Heating jacket
- Sight glass light - fitting
- ANSI flanges
- Extra length
- Special sealing system acc. to DIN 28121
- Special design acc. to customer

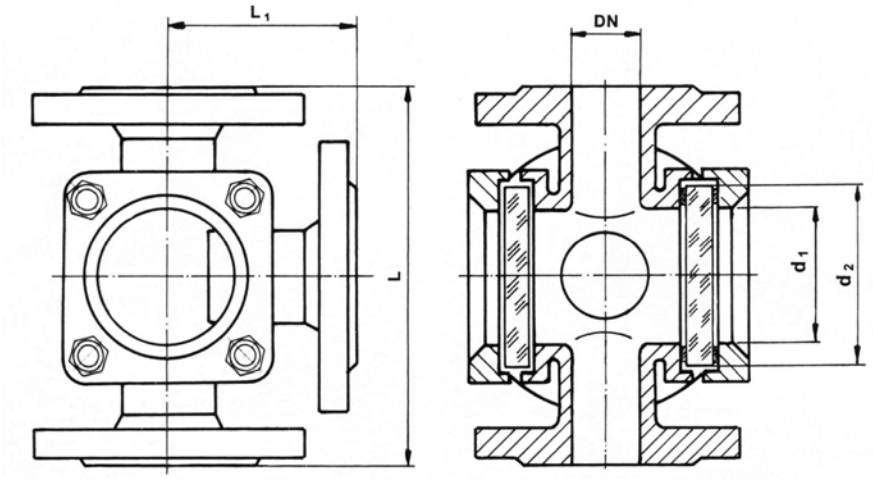

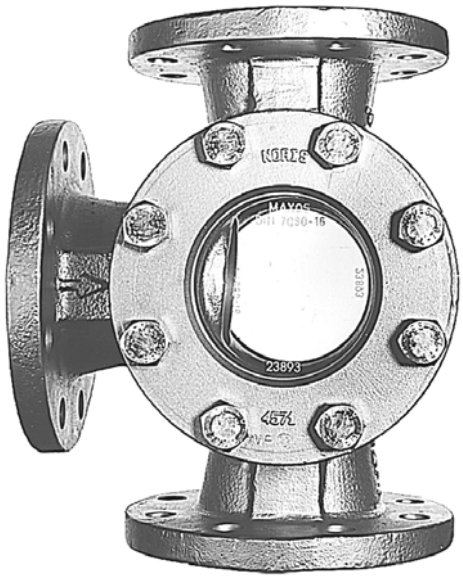

Dimensions:

DN	L	L_1	d_1	d_2
15	130	65	32	45
20	150	75	32	45
25	160	80	48	63
32	180	90	65	80
40	200	100	65	80
50	230	115	80	100
65	290	145	80	100
80	310	155	100	125
100	350	175	125	150

Details to materials or dimensions about glass plates see our NORIS-Bauform 882
DN 125 to DN 250 on request

Materials:

Body	**Steel**	**Stainless steel**
Covers	C 22.8	Stainless steel
Sight glasses	Borosilicate glass acc. to DIN 7080 max. 280°C Soda lime glass acc. to DIN 8902 max. 150°C	
Screws	4.6 gal.	A4-70
Gaskets	Graphite	

Modifications reserved

AVEMAR CZECH s.r.o.

AVEMAR CZECH s.r.o. | speciální armatury pro m Ší ení a regulaci |
Branch office | Podvihovská 378/12C | 747 70 Opava 9 - Komárov | Ł eská republika |
Tel.: +420 553 764 015 | Fax: +420 553 654 820 | www.avemar.cz | avemar@avemar.cz |