Sight glass - Tubular type

with Safety Seal-System, acc. to DIN 28121

AVEMAR CZECH s.r.o.

Bauform 25

Application:

Sightglass - Tubular type with flanges on both sides, to use in either horizontal or vertical pipe lines for optical control of fluids and gasses.

Operating conditions:

Connection:	Flanges PN 10/16
Pressure:	up to DN 100 - 6 bar max
	from DN 125 – 4 bar max
Temperature:	200°C max.

Materials:


1. Flanges:	WN 1.4571	|	Steel H II
2. Distance-Bars:	WN 1.4571	|	Steel
5. Screws:	A4-70	|	Steel
3. Glass tube:	Borosilicate glass (DURAN)		
4. Gaskets:	PTFE covered		

Special designs:

Extra length
Flanges acc. to ANSI
Protection jacket of acrylic glass

Mounting instructions:

Sight glass tubular type must be mounted without tension by tube, vibrations and pressure pushes.

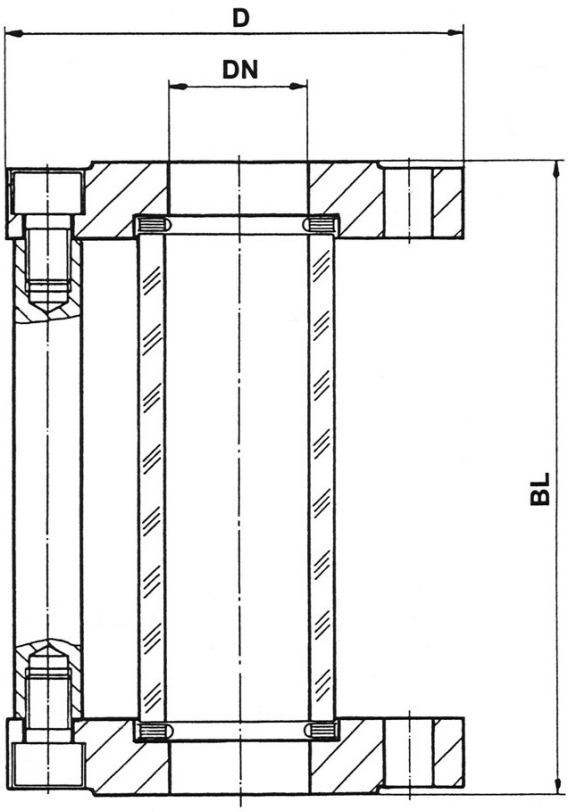


Dimensions:

DN	D	BL
25	115	160
40	150	200
50	165	230
80	200	310
100	220	350
125	250	400
150	285	480



(Picture with Plexi-jacket)

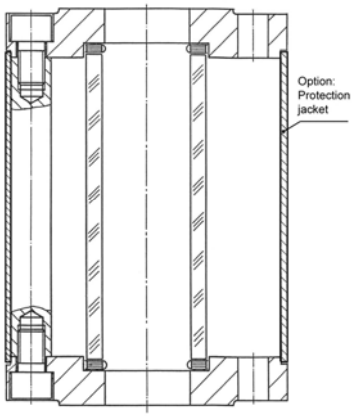

Modifications reserved

AVEMAR CZECH s.r.o. | speciální armatury pro měření a regulaci |
Branch office | Podvihovská 378/12C | 747 70 Opava 9 - Komárov | Česká republika |
Tel.: +420 553 764 015 | Fax: +420 553 654 820 | www.avemar.cz | avemar@avemar.cz |

06/06
E025