Sight Glass -Tubular Type


with Indication- and Non-Return-Ball
with Safety Seal-System (acc. to DIN 28121)

AVEMAR CZECH s.r.o.

Bauform 25-B

Operating conditions:

Connection:	Flanges PN 10/16
Pressure:	6 bar max.
Temperature:	200°C max.

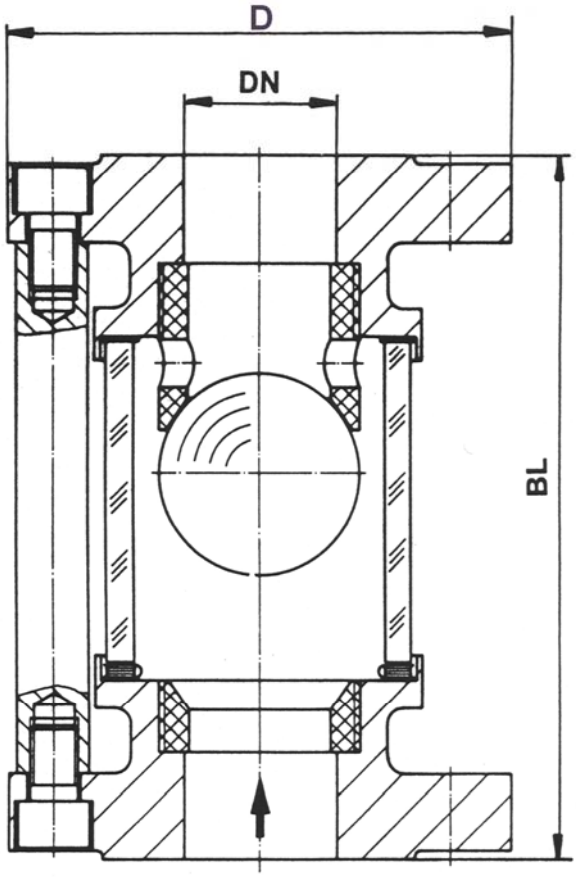

Materials:

Flanges:	WN 1.4571
Screws:	A4-70
Glass tube:	Borosilicate glass (DURAN)
Ball + Seats:	PTFE
Gaskets:	PTFE covered

Spezial designs:

Material: Steel

Hollow-ball possible (3 bar max.)

Mounting instructions:
Sight glass tubular type must be mounted without tension by tube, vibrations and pressure pushes.



Dimensions:

DN	D	BL
25	115	160
40	150	200
50	165	230
80	200	310
100	220	350

Modifications reserved

AVEMAR CZECH s.r.o. | speciální armatury pro měření a regulaci |
Branch office | Podvihovská 378/12C | 747 70 Opava 9 - Komárov | Česká republika |
Tel.: +420 553 764 015 | Fax: +420 553 654 820 | www.avemar.cz | avemar@avemar.cz |