Sight flow indicator

with ***O-Ring sealing*** for ***Vacuum***

AVEMAR CZECH s.r.o.

Bauform 880-V

Application:

Using a sight glass with standard sealing in vacuum mode can lead to leakage.
We recommend:
For medium vacuum rates: PTFE gaskets
For higher vacuum rates: o-ring sealing

Operating conditions:

Working pressure: 16 / 25 / 40 bar
Working temperature: 150°C or 200°C

Installation:

Optional; Take care of flow direction

Options:

Other Materials
Butt weld ends
Sight glass light fittings
Heating jacket
Spinner or flapper

Materials:

Steel GS-C 25 (1.0619 / GP240GH)
Stainless steel WN 1.4408


Body	**GS-C 25**	**1.4408**
Cover	GS-C 25 / S235JRG2	1.4408 / 1.4571
Screw	5.6	A4-70
Glass	Borosilicate glass DIN 7080 Soda lime glass DIN 8902	
Gaskets	PDFE or Viton O-ring	


Certificate (Option)

Acc. to EN 10204 - 2.2 or 3.1

Ordering example:

Sight flow indicator Bauform 880-V
with Viton O-ring sealing
WN 1.4408, Borosilicate glass
DN 50, PN 16

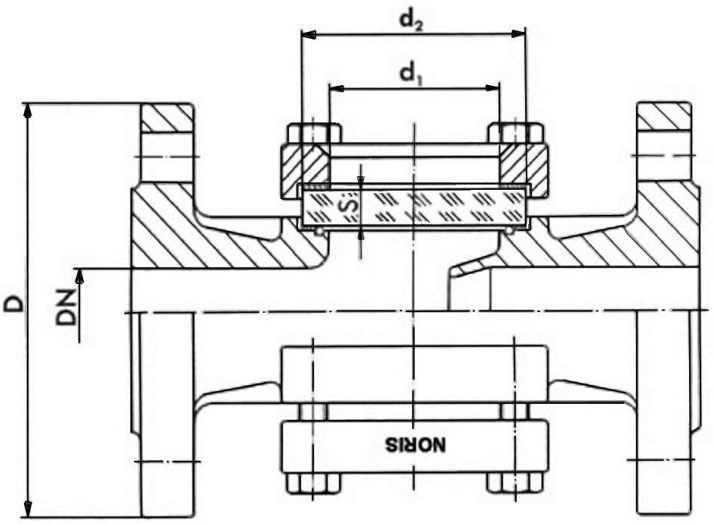

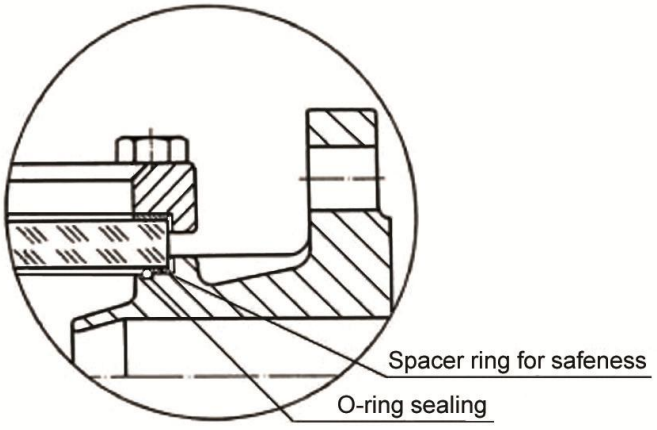

Modifications reserved

AVEMAR CZECH s.r.o.

AVEMAR CZECH s.r.o. | speciální armatury pro měření a regulaci |
Branch office | Podvihovská 378/12C | 747 70 Opava 9 - Komárov | Česká republika |
Tel.: +420 553 764 015 | Fax: +420 553 654 820 | www.avemar.cz | avemar@avemar.cz |