Manhole cover with **sight glass**

to be mounted similar to DIN 28120

(Hand hole, Inspection flange)

Bauform 1205

Application:

By using the integrated sight glass you save a further hole in the vessel.

The fittings shows two functions: a) Compression res. Sight glass

b) Man hole service opening etc.

Operating conditions:

Working pressure: by agreement
Working temperature: 150℃ or 280℃

Options:


Base flanges to be welded
Safety seal-system acc. to DIN 28121
Wiper
Spray washer
Sight glass light fittings


Materials:

Base and cover flanges	Steel or Stainless steel
Glass	Borosilicate glass DIN 7080 Soda-lime-Glas DIN 8902

Dimensions:

DN 150 to DN 800

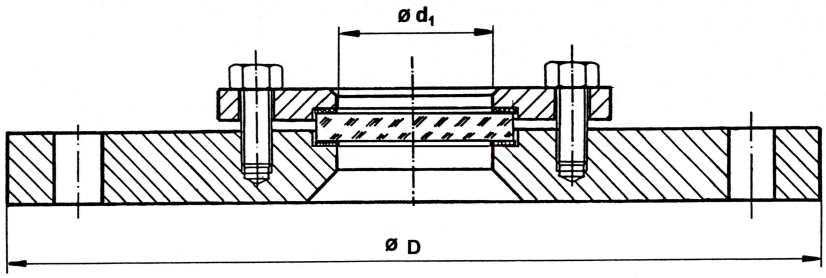

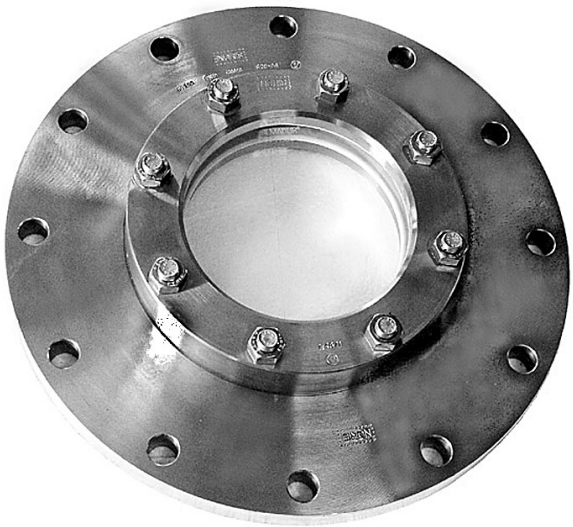

Modifications reserved

AVEMAR CZECH s.r.o. | speciální armatury pro měření a regulaci |
Branch office | Podvihovská 378/12C | 747 70 Opava 9 - Komárov | Česká republika |
Tel.: +420 553 764 015 | Fax: +420 553 654 820 | www.avemar.cz | avemar@avemar.cz |