
High pressure up to 250 bar, 1500 lbs

Model	D-64 / D-100 / D-160 / D-600 / D-900 / D-1500 / D-2500
Material	Stainless steel 316L (1.4404) / 316Ti (1.4571)
Pipe	60.3 x 2,77 mm / 60.3 x 3 mm / 60.3 x 3,2
Pressure	Up to max. 250 bar
Temperature	Max. 450 °C
C. to C.	Till 5500 mm in 1 piece, longer out more pieces
Indication rail	Polycarbonate (max. temp. 105 °C, temporary 120 °C) Aluminium/ Perspex Stainless steel
Process connection	DIN DN 15 – DN 32 / PN 100 – PN 160 B = 75 mm ANSI ½" – 1¼" 600# – 2500# RF – RTJ B = 85 mm Weld or thread (Male/ Female) ½" – 1" B = 75 mm DN 40 – DN 50 and ANSI 1.1/2" – 2" on 1" pipe B = 130 mm
Drain	¼", ½" or ¾" plug BSP or NPT ¼" or ½" with ballvalve Extra flange acc. to DIN or ANSI None
Draingasket	PTFE, Aramide, Graphite
Vent	¼", ½" or ¾" plug BSP or NPT Flange DN 50 or ANSI 2" Same as drain None
Float	From density min. 590 kg/m^3
Drain length	A = depending on pressure and temperature
Extra support	C. to C. > 3 meter for offshore C. to C. > 4 meter for onshore
Pointers	High & Low in stainless steel
Marking	Tag plate acc. to standard lay-out in stainless steel PED marking till mod. III std.
Certificates	Material EN 10204 3.1 + drawing Pressure test acc. HADRO standard Pressure test acc. Lloyds basis GL, LRS or BV certificate NACE MR 01.75 / ISO 15156 WPS/PQR standard material ⟨Ex⟩ II 1/2 G c IIB T1… T4 LCIE 08 ATEX 6015 X
Special	Insulation, spring, electrical tracing

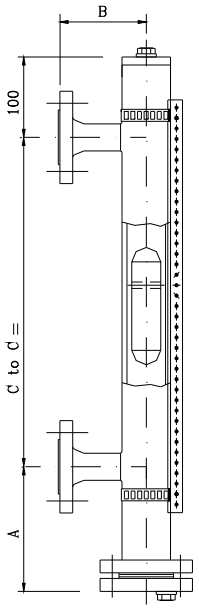

Pointer D